


M50-120T-A-RA



- Hybrid MOV-GSG Technology
- UL1449 Type 1 LISTED
- 50kA Surge Current Rating per mode
- Extended life with no leakage current
- Visual LED fault indicator, audible alarm & remote contacts
- NEMA 6 (exceeds NEMA 4X or 4)
- 10-Year warranty

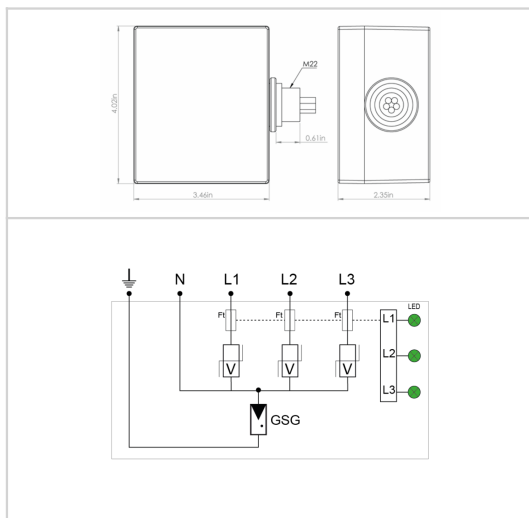

| Electrical Characteristics | | |
|----------------------------|------|--------------------------------------|
| POWER SPD TYPE | | UL1449 TYPE 1 LISTED |
| VOLTS | (V) | 240/120 |
| AC/DC/DC PV/RF | | AC |
| PHASE | (PH) | 1S |
| AMPS | (A) | N/A |
| AMBIENT MIN | (C) | -35 |
| AMBIENT MAX | (C) | +80 |
| Mechanical Characteristics | | |
| MODES | | L-L, L-N, L-G, N-G |
| VPR | (V) | 1200/700/1200/1200 |
| MCOV | (V) | 280/140/140/120 |
| IN | (kA) | 20 |
| 15 impulses 8/20µs | | |
| SCCR | (kA) | 150 |
| IMAX | (kA) | 50 |
| 8/20µs | | |
| Standards | | |
| UL STANDARD | | UL1449 5th Edition |
| UL CATEGORY | | VZCA |
| UL FILE NUMBER | | E326289 |
| STANDARDS | | NOM-003-SCFI-2014, NOM-001-SCFI-1993 |
| ENVIRONMENTAL STANDARDS | | ROHS |
| Part number | | |
| 751106 | | |